

Newport 102

Description:

Newport 102 is a 235°F to 300°F cure, long out-life, general purpose epoxy film adhesive designed for bonding applications requiring high strengths from -67°F to 200°F.

Application:

Newport 102 is suited for structural and secondary bonding applications in aerospace, sporting goods, marine, wind energy, and industrial manufacturing. High shear and peel strengths make Newport 102 ideal for metal-to-metal bonding and sandwich panel manufacturing.

Newport 102 is supplied in standard film weights from 0.030 to 0.090 psf (150-450 gsm), and a variety of commercially available reinforcements, including:

- Non-woven polyester mat (HC)
- Nylon mesh (N), and tricot (TR)
- Metal meshes for electrical management
- Unsupported
- Available in prepreg form (NB1102)

Benefits/Features:

- High toughness
- High strength sandwich panel bonds
- Co-curable with most 250°F curing prepreps
- 30 day out-time at 70°F

Recommended Processing Conditions:

Newport 102 can be cured at temperatures from 235°F to 300°F, depending on service temperature requirements. Low, medium, and high pressure molding techniques may be used to cure Newport 102. Recommended cure cycle is 25psi, 3°F/min ramp to 285°F, hold for 45 minutes, cool to <140°F.

Physical Properties*:

Gel Time (275°F):	5-7 min.
Specific Gravity:	1.20 ± 0.02
Tg (DMA,E')	225°F


Mechanical Properties:

The mechanical properties data supplied in the following table are average values obtained with NB-102 at 0.060 lbs/ft². All metal to metal tests were conducted in accordance with Federal Specification MMM-A-132. Sandwich tests were performed in accordance with Military Specification MIL-A-25463. The test panels were cured at 285°F for 45 minutes using 25 psi.

	-67°F *	RT *	180°F*	220°F*
Tensile shear strength, psi	4100	4500	3000	2300
Sandwich pee str., in-lbs/in	11	16	12	-
Flatwise tensile strength, psi	1000	1100	800	-
Flexural strength, lbs	2800	2900	2400	-


* Values are average and do not constitute a specification

Gel Curve Profile of Newport 102

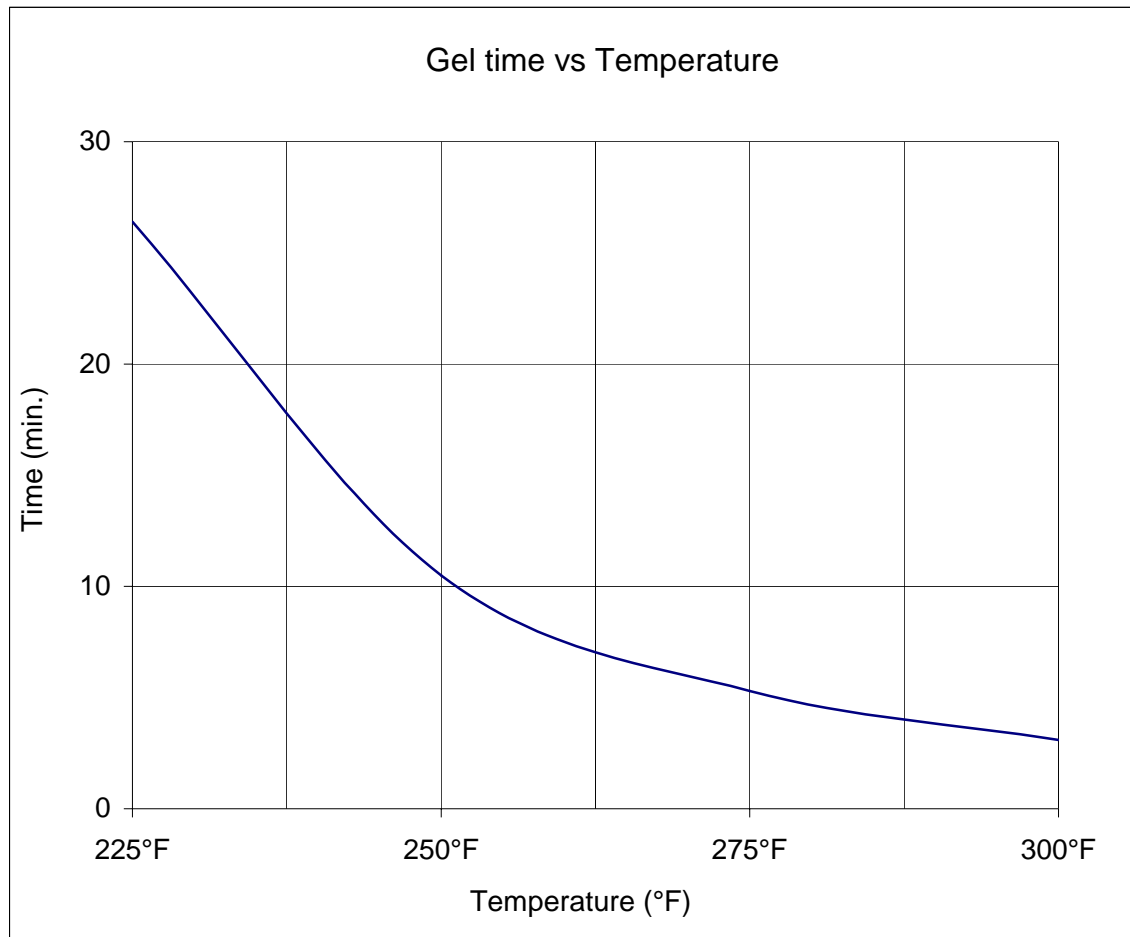

Melt Viscosity Profile of Newport 102

A TA (model AR2000) parallel plate rheometer was used to determine the melt viscosity of the neat resin system.

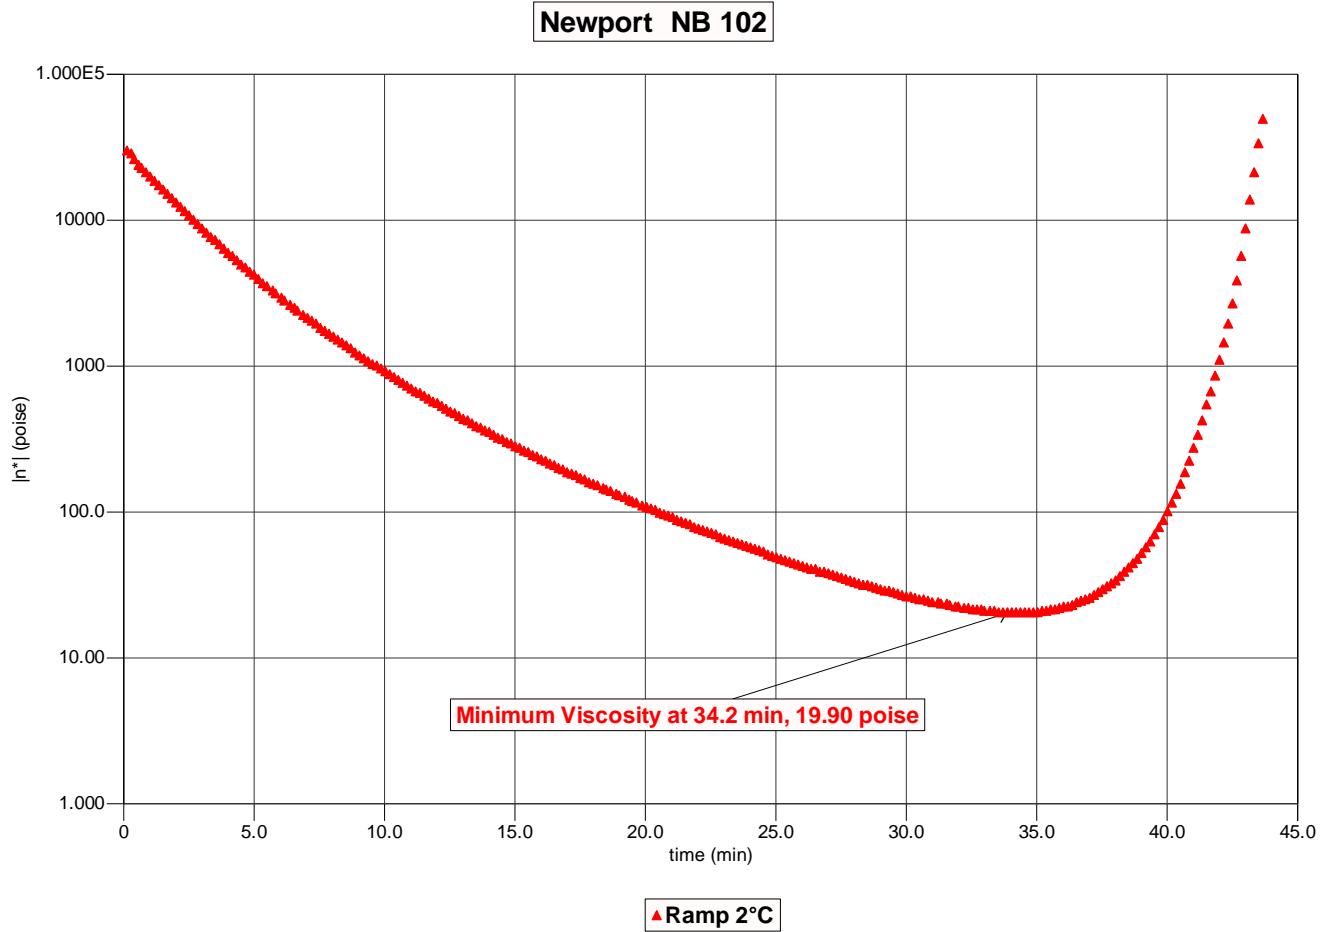

Prepreg Storage:

Material can be stored at 40°F for 3 months, or 0°F for 6 months.

Availability:

Newport 102 is available in film weights from 0.030 to 0.090 psf (150-450 gsm) either unsupported or supported with a carrier. Contact Newport about any special requirements.

For orders, pricing, availability, technical assistance or other inquiries please contact:

CORPORATE OFFICES

Newport Adhesives and Composites

1822 Reynolds Ave,

Irvine, CA 92614

Tel: (949) 253-5680

Fax: (949) 253-5692

Sales@newportad.com

<http://www.newportad.com>

Disclaimer: The information contained herein has been obtained under controlled laboratory conditions and are typical or average values and do not constitute a specification, guarantee, or warranty. Results may vary under different processing conditions or in combination with other materials. The data is believed to be reliable but all suggestions or recommendations for use are made without guarantee. You should thoroughly and independently evaluate materials for your planned application and determine suitability under your own processing conditions before commercialization. Furthermore, no suggestion for use or material supplied shall be considered a recommendation or inducement to violate any law or infringe any patent.

